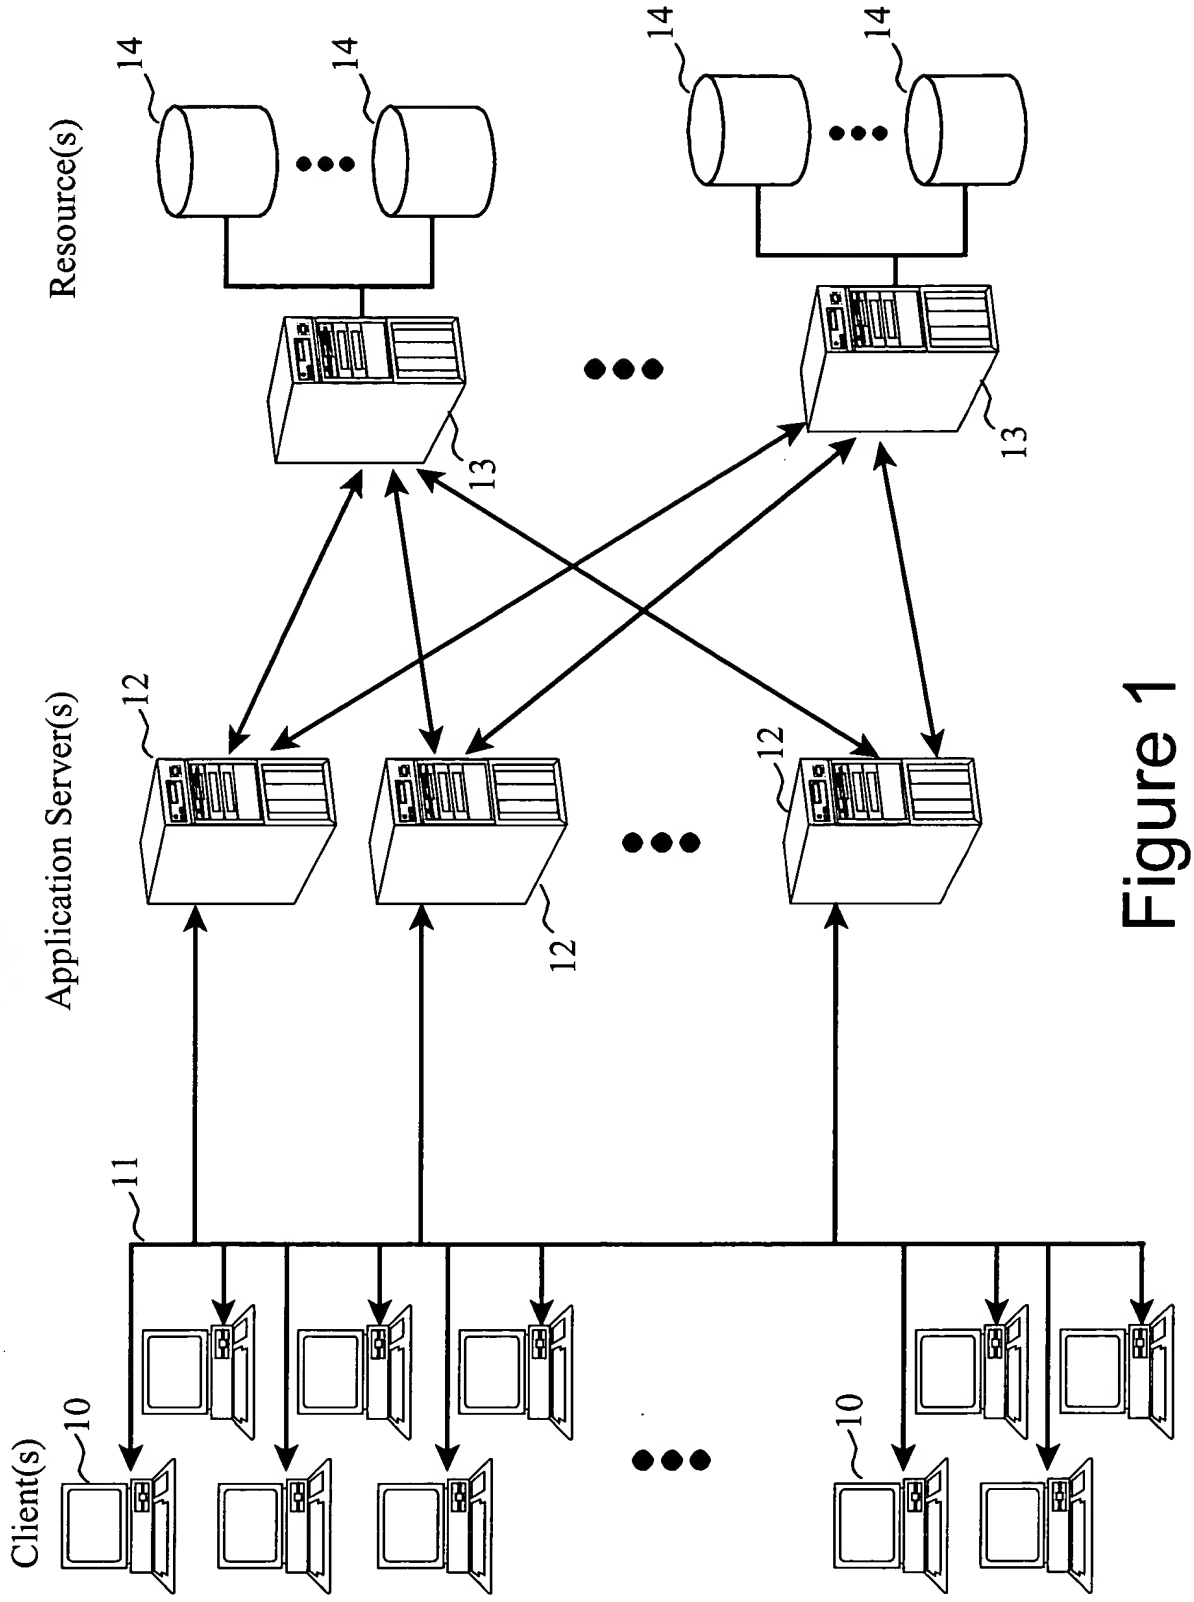

Figure 1

Prior Art

Prior Art

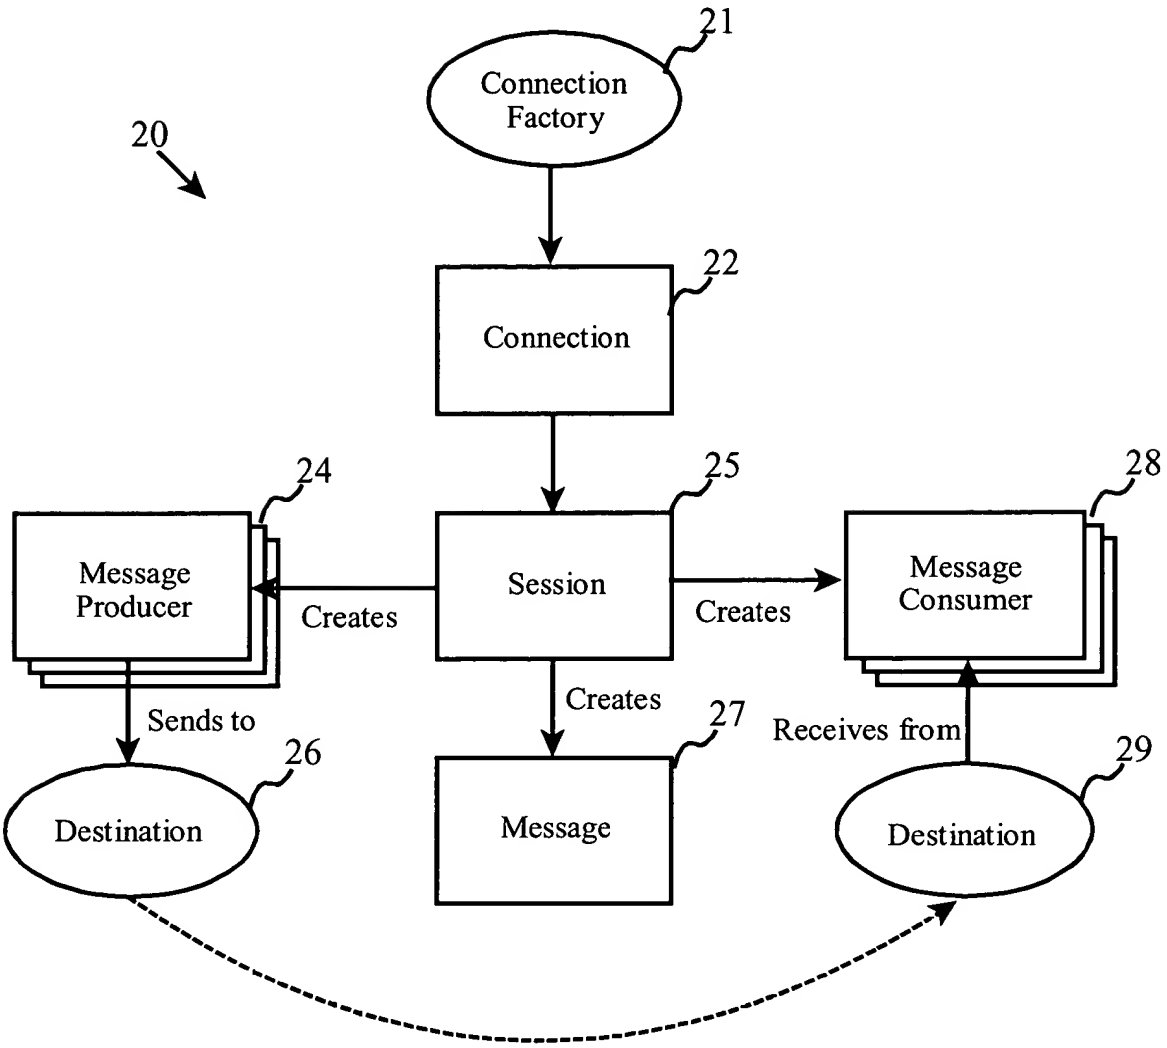

Figure 2

Prior Art

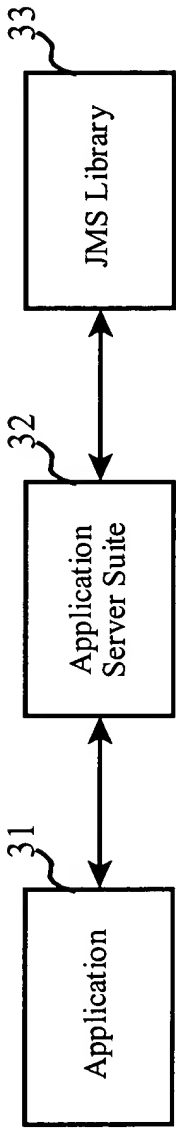

Figure 3

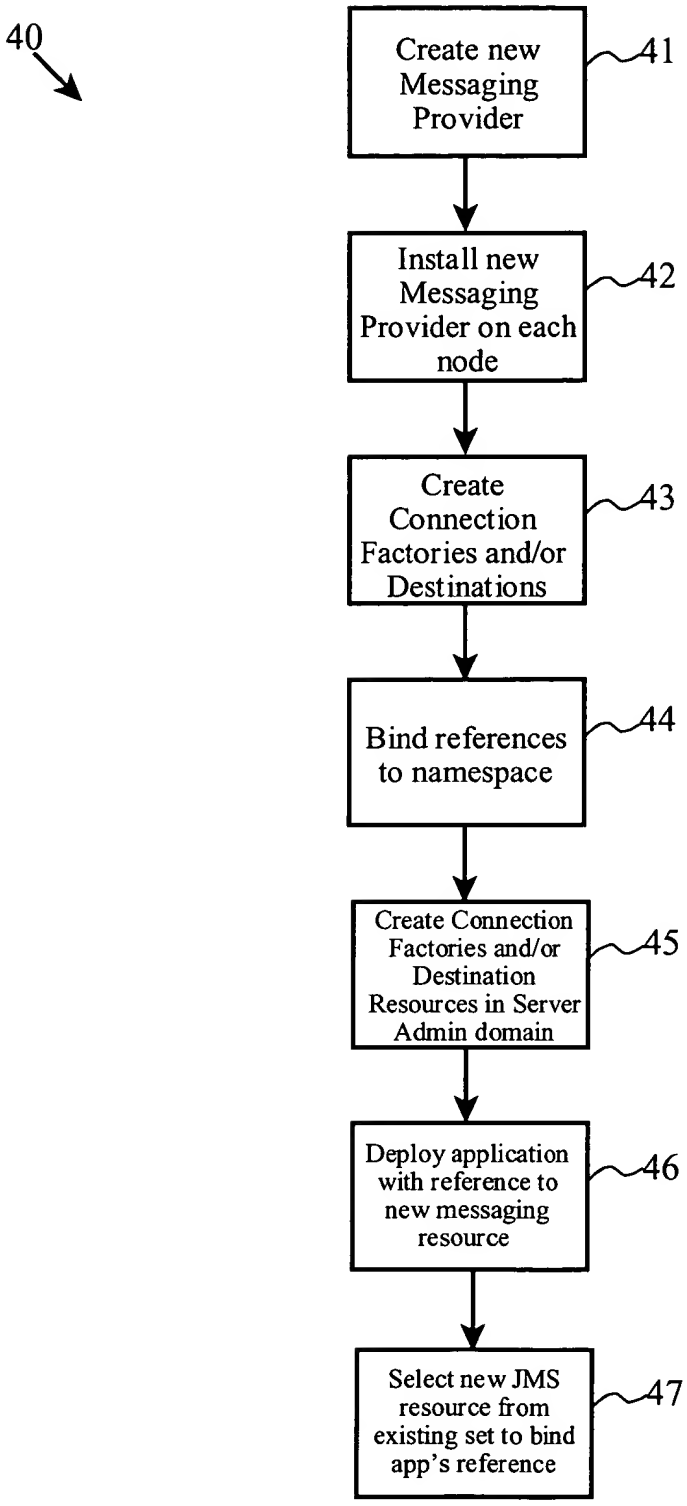
40
Create new Messaging Provider
41
Install new Messaging Provider on each node
42
Create Connection Factories and/or Destinations
43
Bind references to namespace
44
Create Connection Factories and/or Destination Resources in Server Admin domain
45
Deploy application with reference to new messaging resource
46
Select new JMS resource from existing set to bind app's reference
47

Figure 4

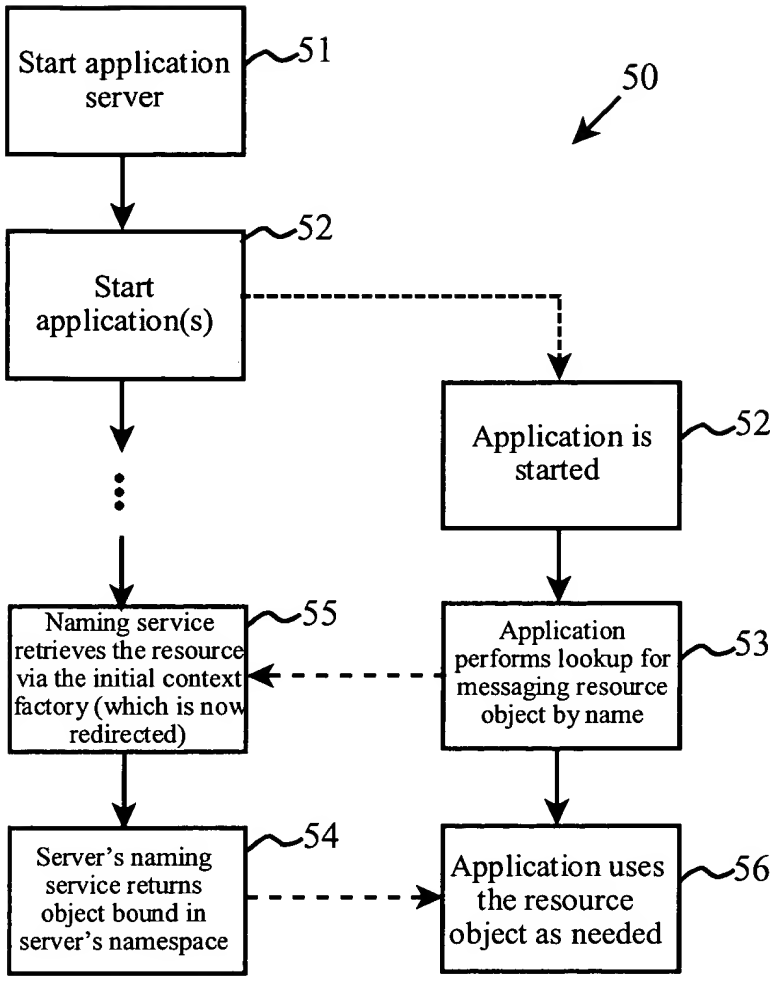
Start application server
51
50
Start application(s)
52
Application is started
52
Naming service retrieves the resource via the initial context factory (which is now redirected)
55
Application performs lookup for messaging resource object by name
53
Server's naming service returns object bound in server's namespace
54
Application uses the resource object as needed
56

Figure 5